


Unilok[®]

Tube To Tube Adapter

U-ANU: An Union

Connects fractional tube to flared (AN) tube

CAD Drawing Download: [go](#)

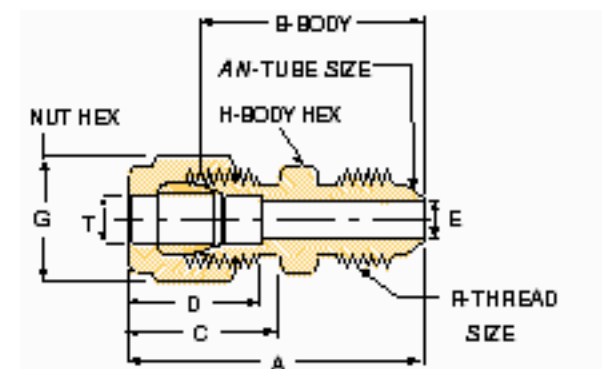

* Working Pressures

Part Number	T Tube O.D.	AN Tube Flare Size	A	B	C	D	E Minimum Opening	G	H	R	Stainless Steel*	Brass*
U1ANU2	1/16	1/8	1.07	0.92	0.43	0.34	0.05	5/16	7/16	5/16-24 UNJF-3	---	---
U2ANU2	1/8	1/8	1.27	1.01	0.60	0.50	0.06	7/16	7/16	5/16-24 UNJF-3	---	---
U2ANU4	1/8	1/4	1.38	1.12	0.60	0.50	0.09	7/16	1/2	7/16-20 UNJF-3	---	---
U4ANU4	1/4	1/4	1.48	1.19	0.70	0.60	0.17	9/16	1/2	7/16-20 UNJF-3	---	---
U5ANU5	5/16	5/16	1.51	1.22	0.73	0.64	0.23	5/8	9/16	1/2-20 UNJF-3	---	---
U6ANU4	3/8	1/4	1.56	1.27	0.76	0.66	0.17	11/16	5/8	7/16-20 UNJF-3	---	---
U6ANU6	3/8	3/8	1.56	1.27	0.76	0.66	0.28	11/16	5/8	9/16-18 UNJF-3	---	---
U8ANU8	1/2	1/2	1.81	1.41	0.86	0.90	0.39	7/8	13/16	3/4-16 UNJF-3	---	---
U12ANU12	3/4	3/4	2.10	1.70	0.86	0.96	0.61	1 1/8	1 1/8	1 - 1/16-12 UNJF-3	---	---
U16ANU16	1	1	2.42	1.94	1.04	1.23	0.84	1 1/2	1 3/8	1 - 5/16-12 UNJF-3	---	---

*Generally, Unilok tube fittings are rated to the maximum allowable working pressures of the tubing recommended for use with the fittings. However, pressure ratings of fittings with AN integral ends may be lower. Click on the "Pressure Ratings" button above or contact your Authorized Distributor for more information regarding tubing and fitting pressure ratings.