


Unilok®

Tube To Female Pipe

U-BFC: Bulkhead Female Connector

Connects fractional tube to male NPT thread

CAD Drawing Download: [go](#)

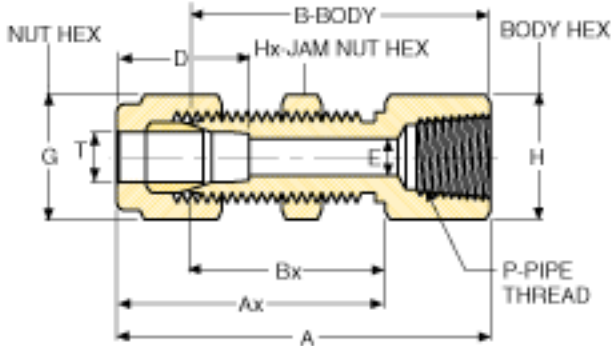

* Working Pressures

Part Number	T Tube O.D.	P-NPT Female Pipe Size	A	Ax	B	Bx	D	E Minimum Opening	G	H	Hx	Maximum Panel Thickness	PANEL Hole Drill Size	Stainless Steel*	Brass*
U2BFC2	1/8	1/8	1.76	1.23	1.50	0.97	0.50	0.09	7/16	9/16	1/2	0.50	21/64	---	---
U4BFC2	1/4	1/8	1.85	1.32	1.56	1.03	0.60	0.19	9/16	5/8	5/8	0.40	29/64	---	---
U4BFC4	1/4	1/4	2.04	1.32	1.75	1.03	0.60	0.19	9/16	3/4	5/8	0.40	29/64	---	---
U6BFC4	3/8	1/4	2.17	1.45	1.88	1.16	0.66	0.28	11/16	3/4	3/4	0.44	37/64	---	---
U8BFC6	1/2	3/8	2.43	1.65	2.03	1.25	0.90	0.41	7/8	15/16	15/16	0.50	49/64	---	---
U8BFC8	1/2	1/2	2.62	1.65	2.22	1.25	0.90	0.41	7/8	1 1/16	15/16	0.50	49/64	---	---

*Generally, Unilok tube fittings are rated to the maximum allowable working pressures of the tubing recommended for use with the fittings. Click on the "Pressure Ratings" button above or contact your Authorized Distributor for more information regarding tubing and fitting pressure ratings.

Finger-tight assembly dimensions (shown in inches) are for reference only and subject to change. When ordering, specify material designator with part number. Click on the "How To Order" button above for complete ordering information.