


Unilok®

Tube To Tube Union

U-BRU: Bulkhead Reducing Union

The Bulkhead Reducer/Adapter tube fitting provides the greatest connection flexibility in panel installations. The Bulkhead Reducer/Adapter can be used with any proper size Unilok tube fitting configuration to meet the installer's special requirements.

CAD Drawing Download: [go](#)

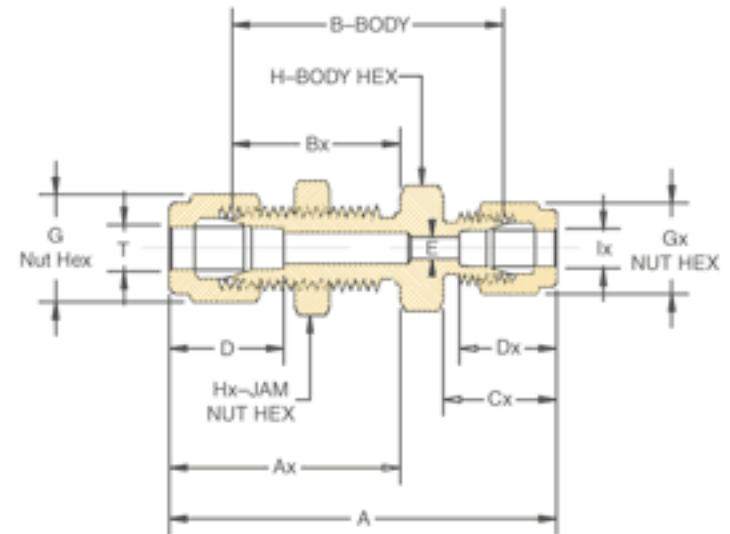

* Working Pressures

Part Number	T Tube O.D.	Tx Tube O.D.	A	Ax	B	Bx	Cx	D	Dx	E Minimum Opening	G	Gx	H	Hx	Maximum Panel Thickness	Panel Hole Drill Size	Stainless Steel*	Brass*
U4BRU2	1/4	1/8	2.17	1.32	1.62	1.03	0.60	0.60	0.50	0.09	9/16	7/16	5/8	5/8	0.40	29/64	---	---
U6BRU4	3/8	1/4	2.39	1.44	1.81	1.16	0.70	0.66	0.60	0.19	11/16	9/16	3/4	3/4	0.44	37/64	---	---
U8BRU4	1/2	1/4	2.63	1.65	1.94	1.25	0.70	0.90	0.60	0.19	7/8	9/16	15/16	15/16	0.50	49/64	---	---
U8BRU6	1/2	3/8	2.68	1.65	1.99	1.25	0.75	0.90	0.66	0.19	7/8	11/16	15/16	15/16	0.50	49/64	---	---

*Generally, Unilok tube fittings are rated to the maximum allowable working pressures of the tubing recommended for use with the fittings. Click on the "Pressure Ratings" button above or contact your Authorized Distributor for more information regarding tubing and fitting pressure ratings.

Finger-tight assembly dimensions (shown in inches) are for reference only and subject to change. When ordering, specify material designator with part number. Click on the "How To Order" button above for complete ordering information.