


Unilok[®]

Tube To Tube Adapter

U-DU: Dielectric Union

The Dielectric Union isolates monitoring and control instruments and equipment from electrical current and voltages.

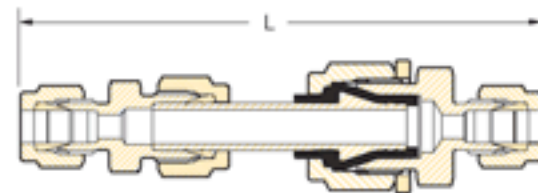

* Working Pressures

Part Number	L (inches)	Stainless Steel*	Brass*
U4DU	4.08	5000	---
U6DU	4.20	5000	---
U8DU	4.79	5000	---
U6DMC4	3.80	5000	---

Dielectric fittings are designed to isolate monitoring and control instruments, and equipment from electrical current and voltages. Manufactured in 316 stainless steel with thermoplastic insulators, SSP Instrumentation's dielectric fittings provide high dielectric strength in applications up to 5,000 PSIG. Typical applications for dielectric fittings are on impulse lines in natural gas pipeline monitoring stations.

Other Product Related Information

Downloads

[Unilok Dielectric Data Sheet](#)

Finger-tight assembly dimensions (shown in inches) are for reference only and subject to change. When ordering, specify material designator with part number. Click on the "How To Order" button above for complete ordering information.