


Unilok®

Tube To O-Ring Boss

U-MBTST: Positionable Male Branch Tee

Connects fractional tube to SAE/MS straight thread boss.

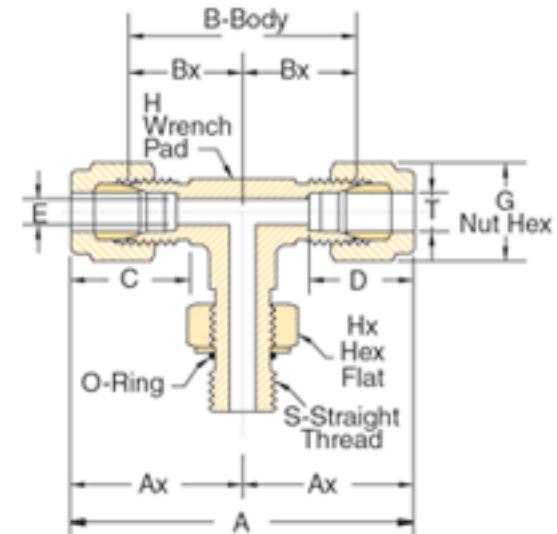

* Working Pressures

Part Number	T Tube O.D.	S SAE/MS Thread Size	A	Ax	C	D	E Min. Opening	H Wrench Pad	Hx Hex Flat	G Hex Flat	B	Bx	AS568 O- Ring Uniform Size Number**	Stainless Steel*	Brass*
U4MBTST4	1/4	7/16-20	2.24	1.12	0.70	0.60	0.19	1/2	9/16	9/16	1.66	0.83	-904	5800	---
U6MBTST6	3/8	9/16-18	2.52	1.26	0.76	0.66	0.28	5/8	11/16	11/16	1.94	0.97	-906	5800	---
U8MBTST8	1/2	3/4-16	2.96	1.48	0.86	0.90	0.41	13/16	7/8	7/8	2.16	1.08	-908	5800	---
U12MBTST12	3/4	1 1/16- 12	3.26	1.63	0.86	0.96	0.62	1-1/16	1-1/4	1-1/8	2.46	1.23	-912	5800	---
U16MBTST16	1	1 5/16- 12	3.98	1.99	1.04	1.23	0.88	1-3/8	1-1/2	1-1/2	3.02	1.51	-916	4500	---

Operating Pressures per SAE J1926/2/ISO. **90 Durometer Viton O-Ring is standard. Other O-Ring compounds are available.